
SEQUEL NAVY



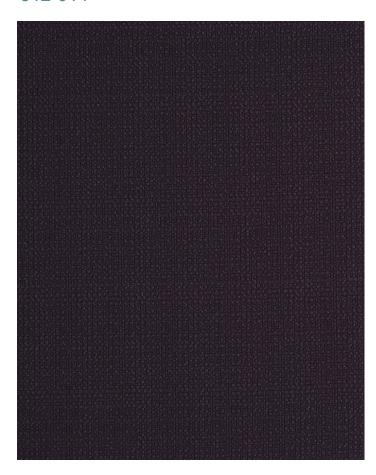

WS: Water/Solvent Cleaner - Spot clean with a mild solvent, an upholstery shampoo, or the foam from a mild detergent.

instructions carefully and clean only in a well-ventilated room.

Avoid any product that contains carbon tetrachloride or other

toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

When using a solvent or dry cleaning product, follow

Additional cleaning details at www.mayerfabrics.com

CATEGORY

Seating/Panel

PROPERTIES



CONTENT

100% Polyester

ADDITIONAL FINISHING AVAILABLE (CHECK FOR PRICING)

Nano-Tex, NanoGuard

FINISH

Nanotex®

WIDTH

54"

WEIGHT

13

SHOWN RAILROADED

No

DIRECTIONALITY

Yes

ROLL LENGTH

60

VISUAL REPEAT

None

BREAKING STRENGTH

Warp: 267.0 lbs. / Fill: 271.0 lbs.

SEAM SLIPPAGE

Warp: 35.0 lbs. / Fill: 47.0 lbs.

ABRASION RESISTANCE

Passes 288,000 Double Rubs* (Wyzenbeek/Cotton Duck) *

* Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan.

PILLING RESISTANCE

Class: 4

COLORFASTNESS TO CROCKING

Dry: Class 4 / Wet: Class 3

COLORFASTNESS TO LIGHT

60 hours



CLEANING