
SEQUEL CHILI 312-019

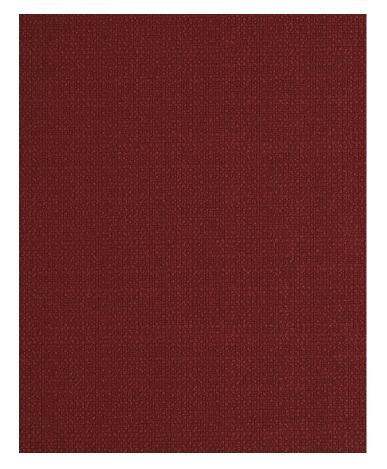

CLEANING

WS: Water/Solvent Cleaner - Spot clean with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

Additional cleaning details at www.mayerfabrics.com

CATEGORY Seating/Panel

PROPERTIES

CONTENT 100% Polyester

ADDITIONAL FINISHING AVAILABLE (CHECK FOR PRICING) Nano-Tex, NanoGuard

FINISH Nanotex®

WIDTH 54"

WEIGHT

SHOWN RAILROADED

DIRECTIONALITY Yes

ROLL LENGTH 60

VISUAL REPEAT None

BREAKING STRENGTH Warp: 267.0 lbs. / Fill: 271.0 lbs.

SEAM SLIPPAGE Warp: 35.0 lbs. / Fill: 47.0 lbs.

ABRASION RESISTANCE Passes 288,000 Double Rubs* (Wyzenbeek/Cotton Duck) * * Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan.

PILLING RESISTANCE Class: 4

COLORFASTNESS TO CROCKING Dry: Class 4 / Wet: Class 3

COLORFASTNESS TO LIGHT 60 hours



TF. 800.428.4415 **T.** 317.267.2626 **F.** 317.267.2629

MAYER FABRICS