
ELEMENT FELDSPAR 316-003



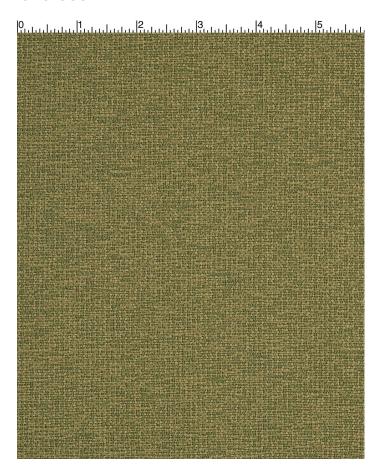

CATEGORY

Seating

CONTENT

85% Recycled Polyester/85% Pre-Consumer Recycled Polyester/15% Polyester

ADDITIONAL FINISHING AVAILABLE (CHECK FOR PRICING)

NanoGuard

FINISH

INCASE(TM) with Antimicrobial Silver Ion Technology

WIDTH

54"

WEIGHT

13

SHOWN RAILROADED

No

DIRECTIONALITY

Yes

ROLL LENGTH

60

VISUAL REPEAT

Non-Matching

BREAKING STRENGTH

Warp: 311.0 lbs. / Fill: 213.0 lbs.

SEAM SLIPPAGE

Warp: 86.0 lbs. / Fill: 75.0 lbs.

ABRASION RESISTANCE

Passes 130,000 Double Rubs* (Wyzenbeek/Cotton Duck) *

* Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan.

PILLING RESISTANCE

Class: 5

COLORFASTNESS TO CROCKING

Dry: Class 4 / Wet: Class 3.5

COLORFASTNESS TO LIGHT

60 hours

CLEANING

WS: Water/Solvent Cleaner - Spot clean with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

Additional cleaning details at www.mayerfabrics.com