
# CIRCUIT ALOE

### 

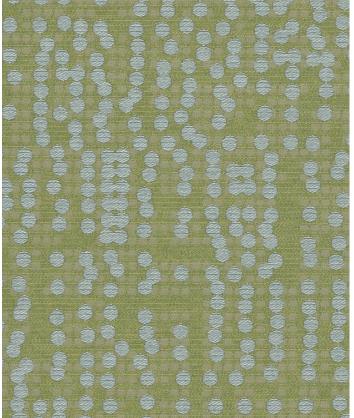

#### CLEANING

**WS: Water/Solvent Cleaner** - Spot clean with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

**BC: Bleach Cleanable** - 1 parts bleach, 4 parts water = 20% bleach, 80% water solution. Do not clean / disinfect fabric for longer than 10 minutes using the 20% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.

Additional cleaning details at www.mayerfabrics.com

## **MAYER** FABRICS

CATEGORY Seating

#### 

CONTENT

100% Repreve Solution Dyed Pre-Consumer Recycled Nylon

FINISH Stain Repellent

WIDTH 54"

WEIGHT

SHOWN RAILROADED No

DIRECTIONALITY Yes

ROLL LENGTH ~55-60 yards

VISUAL REPEAT 14.375, 18.461 Random Match

BREAKING STRENGTH Warp: 187.0 lbs. / Fill: 239.0 lbs.

SEAM SLIPPAGE Warp: 75.0 lbs. / Fill: 84.0 lbs.

ABRASION RESISTANCE Passes 230,000 Double Rubs (Wyzenbeek) \* \* Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan.

PILLING RESISTANCE Class: 5

COLORFASTNESS TO CROCKING Dry: Class 4 / Wet: Class 3

COLORFASTNESS TO LIGHT 240 hours



© Mayer Fabrics 2024

Specifications are subject to change. Current specifications are available at mayerfabrics.com Mayer Fabrics | 500 S. Kitley Ave, Indianapolis, IN 46219

TF. 800.428.4415 T. 317.267.2626 F. 317.267.2629