
# BATIK SANDALWOOD



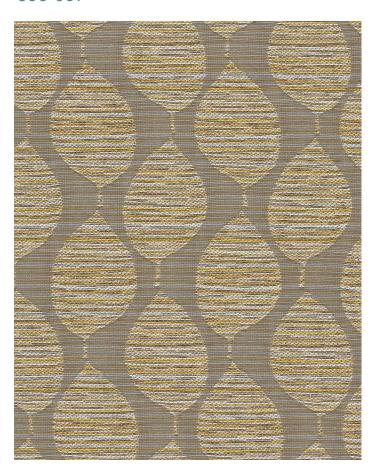

CATEGORY Seating

# PROPERTIES # 分本

#### CONTENT

51% Recycled Polyester (16% Pre-/35% Post-Consumer)/49% Polyester

#### FINISH

Stain Repellent

WIDTH

54"

**WEIGHT** 

10.38

SHOWN RAILROADED

No

**DIRECTIONALITY** 

Yes

**ROLL LENGTH** 

~55-60 yards

VISUAL REPEAT

2.5, 5.0

BREAKING STRENGTH

Warp: 130.0 lbs. / Fill: 187.0 lbs.

**SEAM SLIPPAGE** 

Warp: 30.0 lbs. / Fill: 54.0 lbs.

#### ABRASION RESISTANCE

Passes 51,000 Double Rubs (Wyzenbeek) \*

\* Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan.

### PILLING RESISTANCE

Class: 5

## COLORFASTNESS TO CROCKING

Dry: Class 4 min / Wet: Class 3 min

## COLORFASTNESS TO LIGHT

40 hours

**APPLICATION** 

Indoor

#### **CLEANING**

WS: Water/Solvent Cleaner - Spot clean with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

**BC:** Bleach Cleanable - 1 parts bleach, 9 parts water = 10% bleach, 90% water solution. Do not clean / disinfect fabric for longer than 10 minutes using the 10% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.

Additional cleaning details at www.mayerfabrics.com