


REVERB TANGELO

421-009

MAYER FABRICS

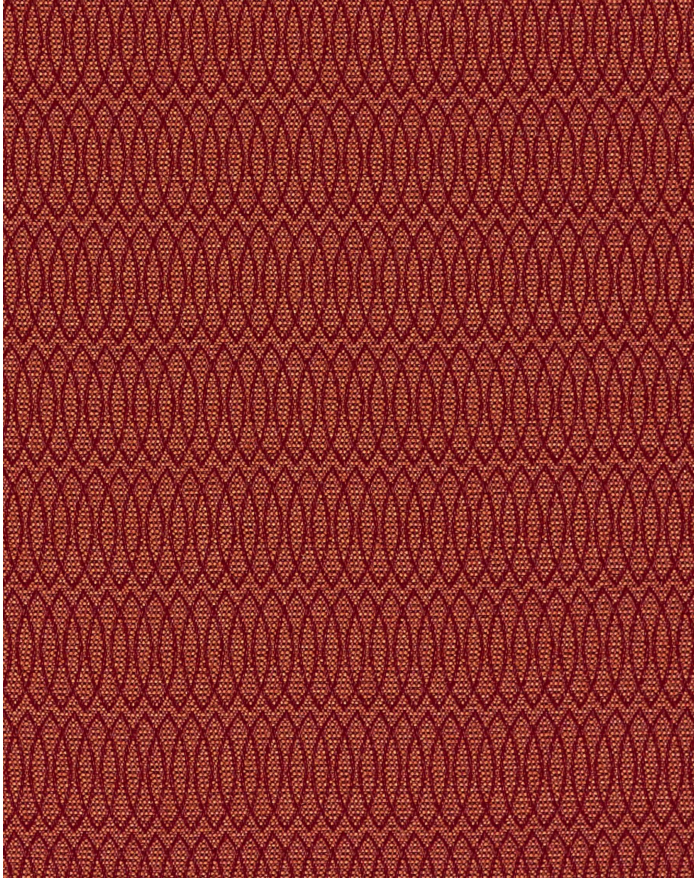

CATEGORY

Seating/Panel

PROPERTIES



CONTENT

100% Recycled Polyester (48% Pre-/52% Repreve Post-Consumer)

ADDITIONAL FINISHING AVAILABLE (CHECK FOR PRICING)

Nano-Tex, NanoGuard

FINISH

None

WIDTH

54"

WEIGHT

9.3

SHOWN RAILROADED

No

DIRECTIONALITY

Yes

ROLL LENGTH

56 yards

VISUAL REPEAT

0.375, 1.875

BREAKING STRENGTH

Warp: 250.0 lbs. / Fill: 180.0 lbs.

SEAM SLIPPAGE

Warp: 70.0 lbs. / Fill: 50.0 lbs.

ABRASION RESISTANCE

Exceeds 100,000 Double Rubs (Wyzenbeek) *

* Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan.

PILLING RESISTANCE

Class: 4 min

COLORFASTNESS TO CROCKING

Dry: Class 4 min / Wet: Class 3 min

COLORFASTNESS TO LIGHT

60 hours

APPLICATION

Indoor

CLEANING

WS: Water/Solvent Cleaner - Spot clean with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

BC: Bleach Cleanable - 1 parts bleach, 9 parts water = 10% bleach, 90% water solution. Do not clean / disinfect fabric for longer than 10 minutes using the 10% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.

[Additional cleaning details at www.mayerfabrics.com](http://www.mayerfabrics.com)

