




**Tangerine**  
SW-019



**Sienna**  
SW-002

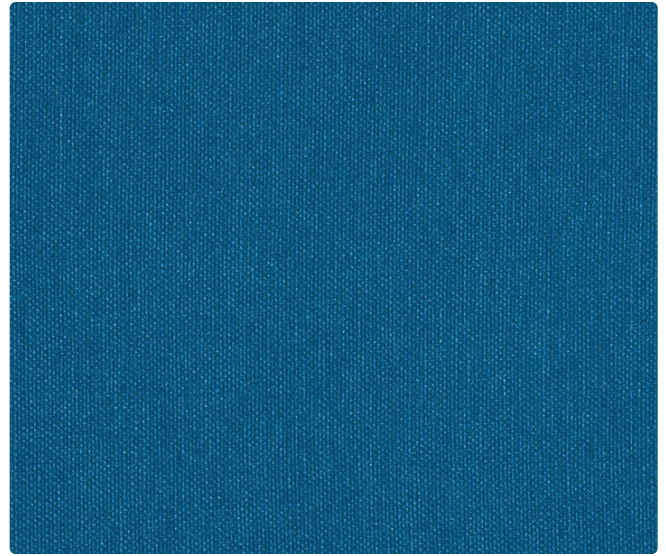


**Calypso**  
SW-044




**Amber**  
SW-029




**Walnut**  
SW-010



**Cayenne**  
SW-009



**Cobalt**  
SW-024



**Willow**  
SW-013



**Ivory**  
SW-027




**Alabaster**  
SW-037



**Cranberry**  
SW-001




**Indigo**  
SW-004



**Jade**  
SW-003




**Camel**  
SW-007



**Cadet**  
SW-016



**Orchid**  
SW-008



**Cyan**  
SW-034



**Lichen**  
SW-033



**Doe**  
SW-017




**Mica**  
SW-020



**Eggplant**  
SW-005




**Baltic**  
SW-014



**Moss**  
SW-023



**Cocoa**  
SW-000



**Graphite**  
SW-006

**Application**  
Seating

**Content**  
100% Vinyl/Urethane Topcoat

**Width**  
54 inches

**Abrasion**  
Passes 930,000 Double Rubs

**Finish**  
*SILVERGUARD*® and  
*PERMABLOK*®

**Reduced Environmental Impact**  
**GREENGUARD Certified**

## TECHNICAL INFORMATION

Content: 100% Vinyl/Urethane Topcoat Width: 54" Weight: 30 oz./linear yd.	Backing: 100% Polyester Hi-Loft™ Finish: <b>SILVERGUARD</b> ® and <b>PERMABLOK</b> ® Cleaning Code: WS, BC	Approx Repeat: None Directional: Yes Railroaded: No
---	--	---

PERFORMANCE (*Certification Marks Owned by ACT®)	Test Method	Results
Surface Abrasion: Heavy Duty <b>A</b> *	ASTM D 4157 (Cotton Duck)	Passes 930,000 Double Rubs
Breaking Strength: <b>✳</b> *	CFFA 17 / ASTM D 751	Warp 121 lbs/Fill 72 lbs
Colorfastness to Light: <b>✳</b> *	AATCC M 16 E / NTC 1479	Passes 1000 Hours - Suitable for marine use
Cold Crack:	CFFA-6a	-10° F

## FLAMMABILITY **✳**\*

California Technical Bulletin 117-2013	Passes	NFPA 701 (small scale)	Passes
NFPA 260 (Equivalent to UFAC) Class 1	Passes	IMO A. 652(16) 8.2 & 8.3	Passes
BIFMA X5.7	Passes	NY & NJ Port Authority	Passes
Boston Fire Dept. Code (BFD 1X-1)	Passes	ASTM E662	Passes
FAA/FAR 25.8530(a) and Appendix F Part I (a)(ii)	Passes	Fed. St. 191A M 5903.1	Passes
FMVSS 302	Passes		

Should comply with California Technical Bulletin 133 when combined with appropriate components.

## REDUCED ENVIRONMENTAL IMPACT

**GREENGUARD Certified products are tested for low chemical emissions to standard UL 2818. For more information, visit [UL.com/gg](http://UL.com/gg).**

## CLEANING INFORMATION

**WS: Water/Solvent Cleaner** – Spot clean, with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

**BC: Bleach Cleanable** – 1 part bleach, 4 parts water = 20% bleach, 80% water solution. Always rinse promptly with clean water after applying the bleach solution.

Remove stains with one of the following steps:

**Step 1** (eye shadow, mascara, grease, black felt tip pen, crayon, chocolate, suntan lotion, hair and body oils\*): Remove excess spill with a damp cloth. Clean with a 1:1 mix of Ivory® liquid soap and water. Next, rinse with clean water and dry.

**Step 2** (red lipstick): Use a straight application of concentrated cleaners such as Formula 409® or Fantastik® spray cleaner. Wipe with a clean cloth, rinse with clean water, and dry.

**Step 3** (blood, urine, feces, oil base paint, tar and asphalt): Use a 1:1 mix of ammonia and water, or a 1:4 mix of bleach and water. Rinse with clean water and dry.

**Steps 4 & 5** (all other tough stains): **Step 4:** Use a straight application of naphtha (lighter fluid). Rinse thoroughly with clean water and pat surface dry. **Step 5:** Use a 1:1 mix of isopropyl alcohol and water. If the stain persists, use straight alcohol. Rinse thoroughly with clean water and pat dry.

**Note:** For cleaning that requires step 4 or 5, use a soft cotton cloth saturated with the cleaning material and rub the stain in circles 10 times. Pat dry with another soft cotton cloth and check the results.

Please refer to the Mayer Fabrics website or contact customer service for approval of unlisted cleaning agents prior to use.

\*Must be cleaned after each instance of exposure to hair and body oils.

The information published in this care guide refers to the performance of PERMABLOK® products in specific tests conducted under laboratory conditions. Results may vary under actual conditions.

This information is not a guarantee and does not relieve the user from the responsibility of the proper and safe use of the product and all cleaning agents. The use of certain agents can be harmful to the surface appearance and lifespan of vinyl. Mayer Fabrics, its agents, and assigns assume no responsibility resulting from the use of such cleaning agents to the vinyl.

Please check compatibility when using this product in combination with painted or varnished surfaces.

PERMABLOK® is a registered trademark of Spradling Holdings, Inc.®

Ivory® is a registered trademark of Procter and Gamble®

Formula 409® is a registered trademark of The Clorox Company®

Fantastik® is a registered trademark of DowBrands, Inc.®, Registered trademark of the Dow Chemical Co.®

Mayer Fabrics is not sponsored by, affiliated with, or endorsed by such trademark owners. Additionally, any use by Mayer Fabrics of any third-party trademark does not constitute any endorsement by Mayer Fabrics of such third party.

## SPECIFIC TREATMENTS

**Ag SILVERGUARD**® SILVER ION TECHNOLOGY SilverWeave is treated with the most advanced silver ion technology, **SILVERGUARD**®, providing a natural germ-fighting defense to help safeguard the consumer against odor and stain causing bacteria. When combined with **PERMABLOK**®, Spradling's patented stain-fighting and abrasion-resistant treatment, also featured in SilverWeave, **SILVERGUARD**® delivers the ultimate performance solution.

**PERMABLOK**® ADVANCED WHITE PROTECTION Protective Finish Anti-fungal/Anti-Bacterial Protection Anti-Stain Finish/Easily Cleaned Anti-Static Slip Finish Urine Stain Resistant Mildew Resistant Backing and Face Superior Disinfectant Resistance Oil Resistant Sulfide Stain Resistant/All Colors UV Stabilized Pigments

**PERMABLOK**® ADVANCED VINYL PROTECTION is a proven vinyl protective coating that's engineered to create a tough effective barrier against germs, stains and surface abrasion, three of the biggest problems encountered in today's commercial environments.

## ADDITIONAL INFORMATION

**Custom Capabilities:** All patterns can be custom colored. Minimum yardage applies.

**Memo Samples:** Please keep this card intact. Individual memo samples can be ordered on our website or by contacting customer service.

**Fabric Color Matching:** Mayer Fabrics always attempts to ship a satisfactory commercial match. Because of industry standard dye lot variation, colors may not match exactly.

**Digital Swatch Card Color Matching:** Due to color variations on different monitors and color printers, actual swatch colors may vary slightly. Please request a memo sample from Mayer Fabrics to ensure proper color representation.

**Specifications:** Specifications are correct at the time of printing. Additional specifications are available on our website.

**For information or assistance with products or services, call us at 800.428.4415 or refer to our website, [www.mayerfabrics.com](http://www.mayerfabrics.com).**



**MAYERFABRICS**