




MAYERFABRICS



SitOnIt • Seating®

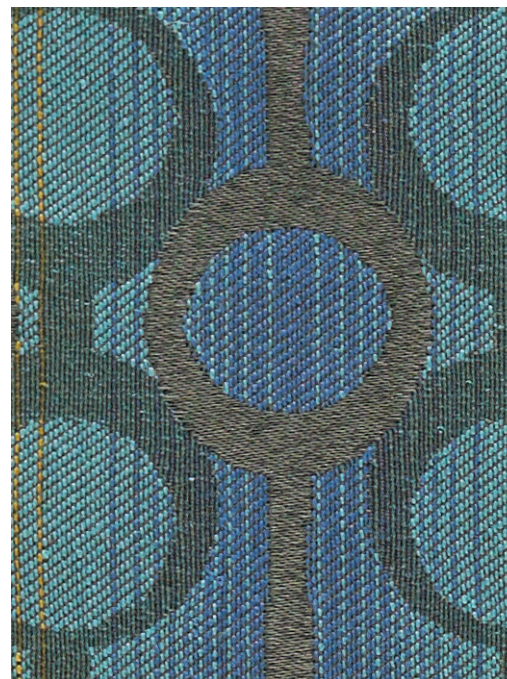

PATIO



Oceanic



Sangria



Vellum



Basket



Aquatint



Sea Salt



Slate

ALIGN




Moody Blue



Fruit Punch



Sea Salt

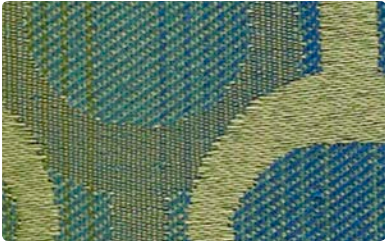

Oasis



Java

PALERMO



Sapphire



Mango



Butter



Ecru



Dove




Poppy



Parsley




Tawny



Storm




Ruby



Aqua




Saddle



Ebony


CONTINUUM

Designed By Kimberle Frost

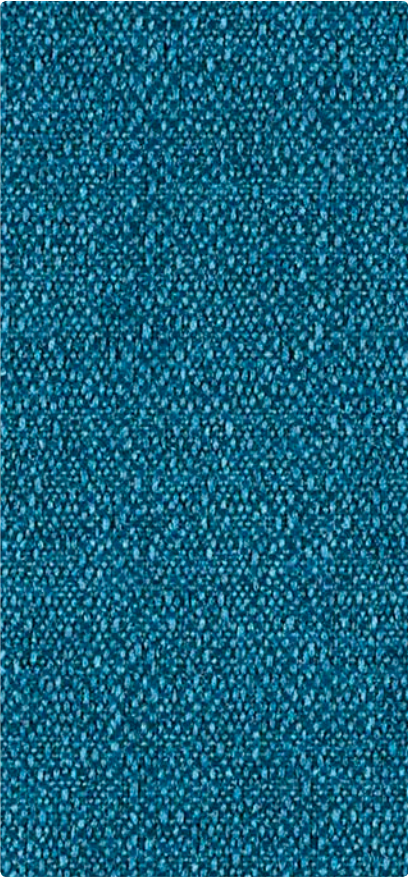

Caribbean

KEY LARGO

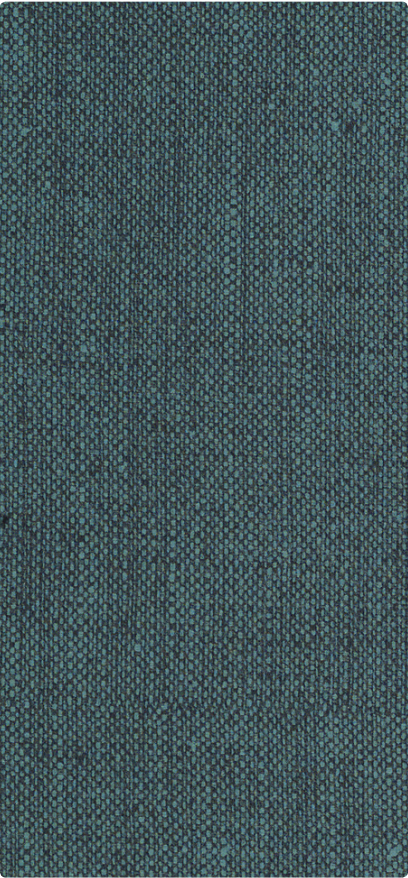

Aegean



Saffron



Lipstick




Cafe Au Lait



Stone



Mandarin



Magenta




Spring




Espresso



Brick




Electric



Pine




Iron



Beet



Indigo



Ocean




Onyx



Jonquil




Pear




Wheat



Parchment



Tangerine




Palm




Toast



Quarry



Cayenne



Nassau



Sandstone



Graphite



Raspberry



Ultramarine



Chocolate




Ebony

technical information

54" Pattern	Content / Backing	Finish	Approx. Repeats	Abrasion Resistance (Double Rubs)	TB 133	Applicable ACT®	Cleaning Code	Grades
Align	100% Polyester	Stain Repellent	3.625" H x 4.375" V	60,000	(133)	*	WS, BC	3
Continuum	100% Post-Consumer Recycled Polyester	Stain Repellent	0.50" H x 0.59" V	130,000	(133)	*	WS	3
Key Largo	86% Vinyl face, 14% Polyester backing - Phthalate (21P) Free	Resilience ^{SR}	Non-Matching	250,000	(133)	*	WS, BC, Resilience cleaning	4
Palermo	100% Polyurethane - PVC FREE	Writer's Block	Non-Matching	250,000	(133)	*	WS, BC	5
Patio	100% Polyester	Stain Repellent	1.875" H x 1.25" V	51,000	(133)	*	WS, BC	3

* ACT® Registered Certification Marks

ALIGN

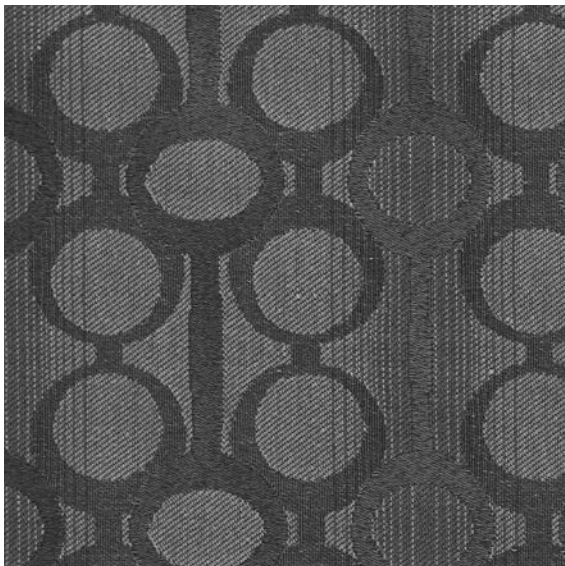

icon upholstery definitions



Fire Retardancy

Flammability testing determines a fabric's resistance to burning. Passes Cal 117.



Colorfastness to Wet and Dry Crocking

The rubbing off of color from fabric onto clothing, hands or other materials and can occur under wet or dry conditions. Passes AATCC 8-1974 Dry Crocking. Class 4 minimum, Wet Crocking. Class 3 minimum.



Colorfastness to Light

The degree to which fabric will retain its color when exposed to light. Passes AATCC 16A-1974 or AATCC 16E-1976. Class 4 minimum at 40 hours. Note: Class 4 minimum at 60 hours is recommended for direct sunlight exposure.



Physical Properties

Brush Pill Test to determine a fabric's pilling, Breaking/Tensile Strength Test determines the ability of a fabric to withstand tension without breaking or tearing. Seam Slippage Test determines the pulling apart of fabrics at the seams. Passes Brush Pill ASTM D3511, 3-4 minimum, Breaking Strength ASTM D3597-D1682-64 (1975) 50 lbs. minimum in warp & weft, Seam Slippage ASTM D3597-D434-75 25 lbs. minimum in warp & weft.



Abrasion

The ability of a fabric to withstand damage from wear and rubbing. Passes Heavy Duty Contract ASTM 3597 modified (No.10 cotton duck); 30,000 double rubs Wyzenbeek Method or ASTM 4966 modified (with 21 oz. wt.); 40,000 rubs Martindale Method.



TB 133

These fabrics can be used in combination with other designated SitOnIt and IDEON components to meet the California Technical Bulletin 133 standard for furniture flammability.

cleaning code definitions

WS: Water-based cleaning agents or foam.

BC: Bleach Cleanable

For the complete selection of patterns and colorways and/or samples of our specific fabrics, contact Mayer.

SitOnIt • Seating®



888.274.8664

714.995.4855 Fax

www.sitonit.net

sales@sitonit.net

www.IDEONDesign.com

sales@ideondesign.com

Showroom Locations

Los Angeles

6415 Katella Avenue
Cypress, CA 90630

Chicago

222 Merchandise Mart Plaza
Suite 1150
Chicago, IL 60654

New York City

11 East 26th
New York, NY 10010



MAYERFABRICS

T 317.267.2626 or 800.428.4415
F 317.267.2629 or 877.7SAMPLE
www.mayerfabrics.com
©2016 Mayer-Paetz, Inc.

51116
EDBMCD